

BOGE CC-2 oil-water separator

Oil-water separation, as efficient as never before.



CC 60-2

Simple to maintain and suitable for all types of oil



CC 30-2



CC 20-2



CC 10-2



CC 5-2



CC 4-2




CC 2-2



NO LIMITATION

Traditional gravity separation of oil and water is overburdened as modern fully synthetic oils in particular, which are increasingly used in compressors, tend to emulsify in condensate. The good news: The BOGE CC-2 accommodates this with all compressor oils and is approved worldwide.



NO WORDS

To assess the condition of the filter, the new oil-water separators from BOGE have two indicator displays - one per tower. The display in the first tower indicates when the filter element is saturated, while the second keeps a diligent check on the overflow.



NO LONG BREAKS

Downtime is always unproductive so it is good if this can be limited. The BOGE CC-2 works with ergonomically divided filter units, which weigh less in their saturated condition and can therefore be removed more quickly. The second condensate drain also serves to speed up maintenance.



WITH MAXIMUM CAUTION

An electronic alarm contact is also available as an option from model CC 5-2 onwards, and this releases automatically when the filter is saturated. This alarm contact can easily be integrated into a higher-level control – which means the system is effectively “Industry 4.0-ready”.

Approval by the German Institute for Structural Engineering (DIBt) proves that the new BOGE CC-2 oil-water separator complies reliably with the legal threshold values for hydrocarbons when processing “dischargeable” water from condensate via different filter stages – irrespective of which oil you use. The new models are particularly convincing with regard to ease of maintenance – from type CC 5-2 they can also be fitted with an automatic saturation alarm if required.


**BOGE Compressed Air Systems
 GmbH & Co. KG**

P.O. Box 10 07 13 · 33507 Bielefeld
 Otto-Boge-Straße 1-7 · 33739 Bielefeld
 Tel. +49 5206 601-0 · Fax +49 5206 601-200
 info@boge.com · boge.com

GRAVITY SEPARATION IS A THING OF THE PAST

Condensate forms in any compressor. As the condensate mixes with oil in oil-lubricated compressors, it has to be processed prior to removal. However, even with modern fully synthetic compressor oils, there is a failing in the gravity separation that has been used up to now for processing condensate. BOGE CC-2 oil-water separators therefore operate with different filter stages. The condensate is discharged from above via a pressure relief chamber and flows through the first polypropylene element. The next filter stage takes place in the second tower, before the charcoal filters out the final impurities – therefore residual oil content of < 10 ppm is achieved at the outlet and that applies to all compressor oils.

THE DESIGN PRINCIPLE

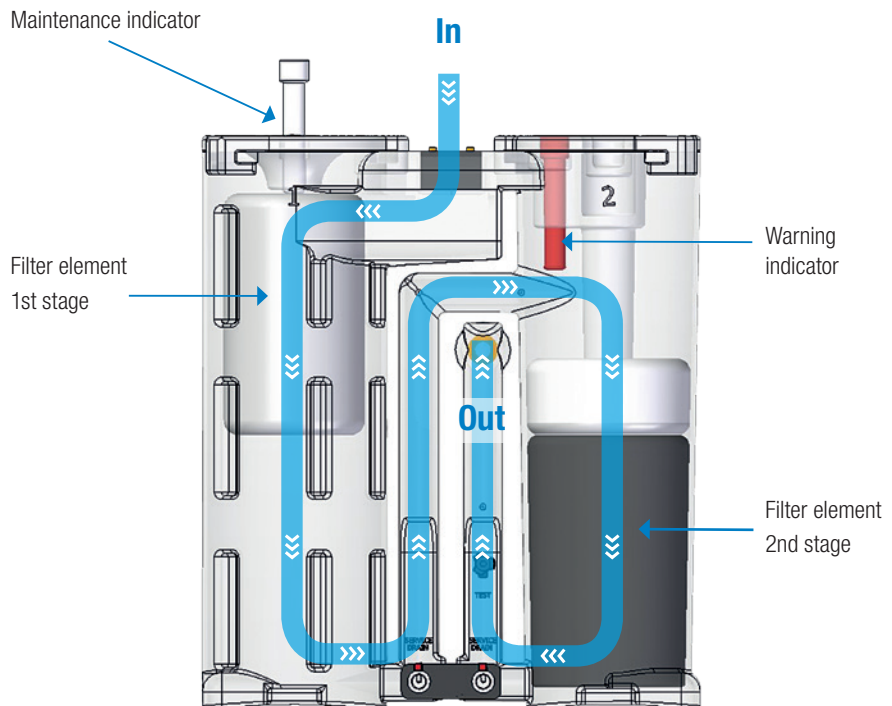

FOR EVERY OIL AND EVERY SIZE OF COMPRESSOR

BOGE type	Compressor performance		Capacity for amount of oil		Dimensions W x D x H mm
	m ³ /min.		Litres		
CC 2-2	2		2		255 x 239 x 230
CC 4-2	4		4		392 x 368 x 210
CC 5-2	5		5		580 x 610 x 190
CC 10-2	10		10		650 x 750 x 240
CC 20-2	20		15		780 x 900 x 305
CC 30-2	30		25		970 x 900 x 380
CC 60-2	60		50		1160 x 1040 x 480