

BOGE AIR. THE AIR TO WORK.



BOGE Paintline



The all-in-one compressed air solution for high-quality surface technology:

Efficient, low-maintenance and dependable.

HOW IT WORKS:

BOGE Paintline is based on an oil-injection cooled screw compressor in combination with special filter technology. This enables purity class 1 to be reached for solid impurities and residual oil content, and class 4 for water content. The various components of BOGE Paintline work together so effectively that the only system configuration that is needed is to set the free air delivery required. The filter technology used in the system is matched


to the maintenance intervals for the compressor, and has a lifetime of at least 3,000 operating hours. A treatment system for the oily condensate produced is also already incorporated. The proven BOGE DUOTHERM heat recovery system and a frequency controller are optional equipment that can also be integrated.

„ALL-IN-ONE“
SOLUTION



BOGE Paintline is made up of perfectly coordinated system components in proven BOGE quality. Galvanized receiver shown is non standard and offered as extra cost option.

PREVIOUS INSTALLATION:

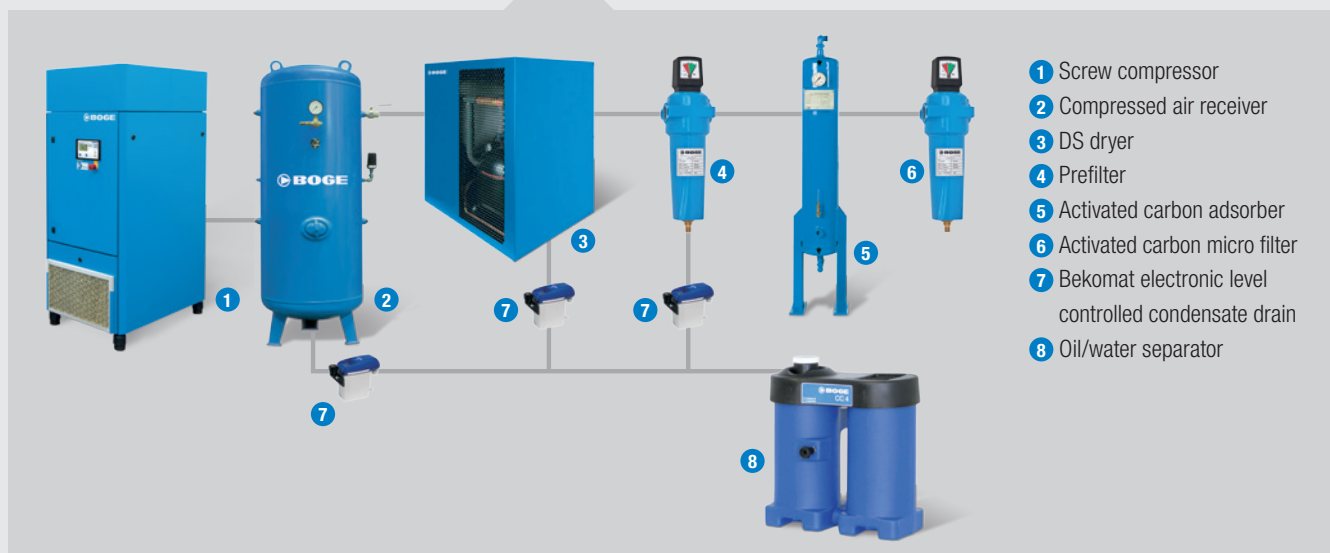

It all fits together perfectly: BOGE Paintline allows you to generate extremely pure, oil-free compressed air that is precisely tailored to the needs of industry and the trades, particularly in the field of surface technology. As a system provider, BOGE creates an optimally tailored all-in-one system comprising compressed air generation, compressed air treatment, and condensate disposal in proven BOGE premium quality as a complete plug-and-play solution. Since everything comes from just one source, you can be sure that your compressed air generation will be extremely low-maintenance and efficient, thanks to the perfect interplay of all the components!

CONCENTRATING ON THE ESSENTIAL

BOGE's Paintline filter unit, which is itself completely free of any substances that prevent paint adhesion, effectively removes oils, oil vapours and particles that could prevent paint adhesion (tested in accordance with VW Group Standard PV3.10.7, version 02/2005) – allowing the high standard of our filter technology to be reflected in your products.



ALL-IN-ONE SOLUTION

BOGE supplies the complete tailor-made and ready-to-use system, containing all the components necessary for generating and filtering compressed air. This saves you the time and expense of fitting pipework and cabling – all you have to do is set the free air delivery you require.

PROVEN PREMIUM QUALITY

The BOGE Paintline system is based on proven BOGE premium quality you can depend on. High quality and attention to detail are of prime importance in producing and assembling all the components. Every element installed is low-wear and maintenance-friendly.

MAXIMUM EFFICIENCY

Take advantage of the compatibility of our system components: achieve even greater efficiency with BOGE Paintline by additionally integrating the BOGE DUOTHERM heat recovery system and a frequency controller.

LABS* FREE FILTER TECHNOLOGY

The BOGE Paintline filters are pre-assembled as a single cartridge and offer many advantages: The special LABS* free filters have a long service life. The oversized design means pressure losses are reduced to a minimum. Optimised in line with the compressor maintenance schedule, they are designed for a service life of at least 3,000 hours of operation.

* LABS = paint wetting disruptive substances (e.g. silicones and oils)

C series rounds off BOGE Paintline.

The integrated compressor air end is distinguished by its high free air delivery and its low power requirement. The motor rating extends up to 11 kW, and an effective free air delivery of up to 1.820 m³/min can be obtained.

BOGE KOMPRESSOREN

Otto Boge GmbH & Co. KG

P. O. Box 10 07 13 · 33507 Bielefeld

Otto-Boge-Straße 1–7 · 33739 Bielefeld

phone +49 5206 601-0

fax +49 5206 601-200

info@boge.com · www.boge.com



WELL THOUGHT OUT AND MAINTANANCE FRIENDLY

Compressors in the C series include an integrated oil separator, which effectively pre-separates the oil using the force of gravity. All maintenance-relevant parts are easy to reach and maintain.



BOGE Model	Max. pressure**		Effective free air delivery*		Motorpower		Receiver volume Litres
	bar	psig	m ³ /min	cfm	kW	HP	
C 7 LDR	10	150	0,728	25	5,5	7,5	270–500

* Free air delivery figures in accordance with ISO 1217, Appendix C, at 20 °C ambient temperature and maximum pressure. Emitted sound pressure levels from 72 dB(A) according to DIN EN ISO 2151:2009.

** Max. pressure of the compressor, the 7.5 bar indications are to be provided as reference values. The machines are shipped standard in 8 bar. Ask for further receiver dimensions.

BOGE Model	Max. pressure**		Effective free air delivery*		Motorpower		Receiver volume Litres
	bar	psig	m ³ /min	cfm	kW	HP	
C 9 LFDR	7,5	110	0,25–1,31	9–43	7,5	10,0	270–500
C 9 LFDR	8,0	115	0,26–1,27	9–42	7,5	10,0	270–500
C 9 LFDR	10,0	150	0,25–1,12	9–40	7,5	10,0	270–500

* Free air delivery figures in accordance with ISO 1217, Appendix C, at 20 °C ambient temperature and maximum pressure. Emitted sound pressure levels from 59,5 dB(A) according to DIN EN ISO 2151:2009.

** Max. pressure of the compressor, the 7.5 bar indications are to be provided as reference values. The machines are shipped standard in 8 bar.

BOGE Model	Max. pressure**		Effective free air delivery*		Motorpower		Receiver volume Litres
	bar	psig	m ³ /min	cfm	kW	HP	
C 10 LDR	7,5	110	1,130	39	7,5	10,0	350–750
C 10 LDR	8,0	115	1,100	38	7,5	10,0	350–750
C 10 LDR	10,0	150	1,060	37	7,5	10,0	350–750
C 15 LDR	7,5	110	1,820	64	11,0	15,0	350–750
C 15 LDR	8,0	115	1,770	62	11,0	15,0	350–750
C 15 LDR	10,0	150	1,700	60	11,0	15,0	350–750

* Free air delivery figures in accordance with ISO 1217, Appendix C, at 20 °C ambient temperature and maximum pressure. Emitted sound pressure levels from 63 dB(A) according to DIN EN ISO 2151:2009.

** Max. pressure of the compressor, the 7.5 bar indications are to be provided as reference values. The machines are shipped standard in 8 bar.

The listed performance data is representative of standard compressors.